




Item	Value	Remark
Nominal voltage	100-240V	
Nominal frequency	50–60Hz	
AC voltage range	90-264V	
DC voltage range (start)	NA	
DC voltage range (operation)	NA	
Nominal current	150mA / 70mA	Full load @100VAC / 230VAC
Total Harmonic Distortion (THD)	< 20%	Full load @100VAC / 230VAC
Power factor	0.4-0.9C	Full load
Displacement factor	0.4-0.9C	Full load
Efficiency	84% (Typ.)	Full load @230VAC
No-load power	NA	
Stand-by power	NA	
Protection class	II	Suitable for class II luminaires
Inrush current	9 A @ 30 μs	
Max.units per circuit breaker	Type B , 10A MCB	27
	Type B , 16A MCB	43
	Type C , 10A MCB	33
	Type C , 16A MCB	53
Earth leakage current	NA	
Nominal voltage range	12V	
Maximum voltage	14V	
Voltage accuracy	±5%	Full load @230VAC
Typical Output LF voltage ripple	±5%	(<120Hz)
SVM	≤ 0.4	Full load @100/230VAC
P <sub>stLM</sub>	≤ 1	Full load @100/230VAC
Starting time	< 1.2 S	Full load @100VAC
Nominal current range	50-1000mA	
Nominal power range	0.6-12W	
Maximum current	1000mA	
Maximum power	12W	
Start-up Delay	< 0.5S	Full load @230VAC

	Item	Value	Remark
<b>Dimming</b>	Dimming control	NA	
	Dimming technique	NA	
	PWM frequency	NA	
	Dimming range	NA	
	Lowest dimming current	NA	
	Galvanic isolation	NA	
<b>Environment</b>	Ambient temperature range $t_a$	-20°C - +50°C	
	Maximum case temperature $t_c$	80°C	
	Max. case temp. in fault condition	110°C	When operating under fault conditions, the temperature of the enclosure at any location should not exceed 110 °C
	Storage temperature range	-25°C - +95°C	
	Relative humidity	10% - 85%	
	Surge transient protection	1kV	L/N
	Environmental rating	Indoor	
	IP rating	IP20	
	Mains switching cycles	> 100,000	
	Expected lifetime	> 50,000 h, $t_c$ 80 °C @ $t_a$ 50 °C	0.2 % / 1,000 h failure rate
		> 100000 h, $t_c$ 70 °C @ $t_a$ 40 °C	0.1 % / 1,000 h failure rate
<b>Packing</b>	Gross weight/Carton	3.8 kg	
	Net weight/Carton	3.0 kg	
	Pcs/Carton	50 PCS	
	Dimension/Carton	240(L)*190(W)*185(H)mm	
<b>Protections</b>			
Short-circuit Protection		Auto recovery	
Open-circuit Protection		Auto recovery	
Overload Protection		Auto recovery	
<b>Conformity &amp; Standards</b>			
Safety:		EN 61347-1, EN 61347-2-13, EN 62493	
Performance:		EN 62384	
EMC standard:		EN 55015, EN 61000-3-2, EN 61000-3-3, EN 61547	
SAA standard		AS/NZS 61347.1, AS 61347.2.13	
<b>Cable information</b>			
<b>PRI</b>			
Cable cross-section		0.5-1.5□/AWG 20-16	
Stripping		9mm	
Pull test cable type		H03VV(H2)-F 2x0,75-1,0 m <sup>2</sup> , H05VV(H2)-F 2x0,75 m <sup>2</sup>	
<b>SEC</b>			
Cable cross-section		0.5-1.5□/AWG 20-16	
Stripping		9mm	
<b>Terminal information</b>			
<b>PRI-Push button</b>			
<b>SEC-Push button</b>			

\* If not mentioned, all the test conditions are based on full load at 100/230VAC input (for 100-240 VAC input).


\*Subject to change without notice, HEP guarantees all products perform functionally well\*

**Electrical Values**

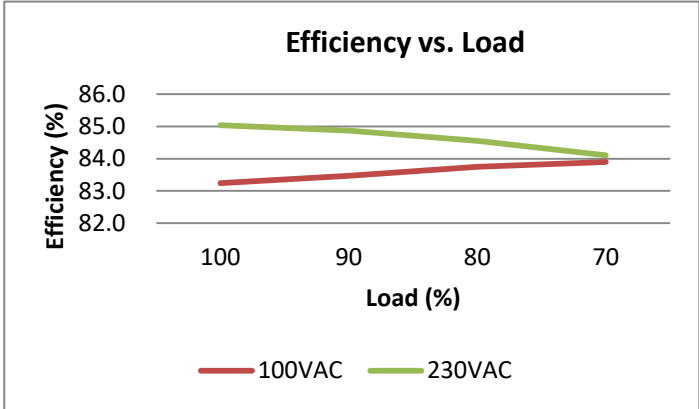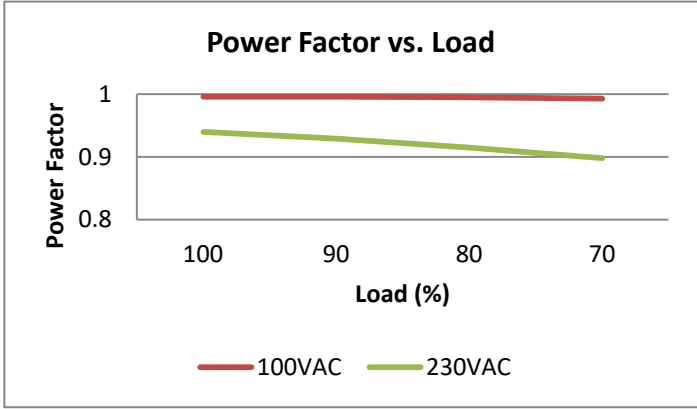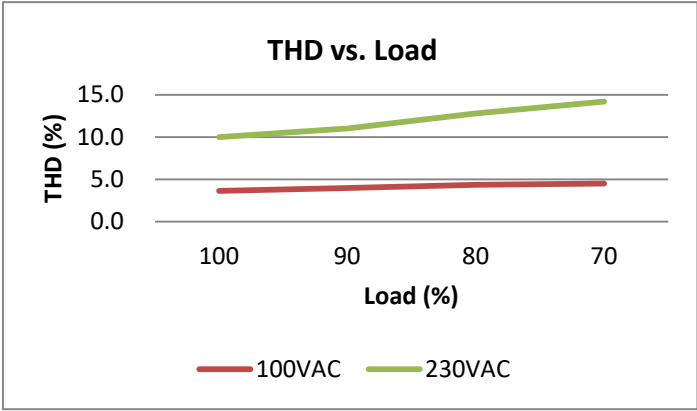

## Physical

### Parameter

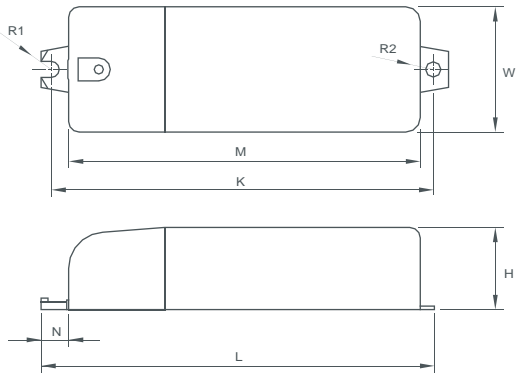

L : 106.2 mm    H : 21.5 mm

M : 92 mm    K : 100 mm

N : 7.4 mm    R1 : 2.1 mm

W : 32.9 mm    R2 : 2 mm

Slot On One Side Allowing Alignment :  $K \pm 3$  mm

Tolerance :  $\pm 1$  mm , R :  $\pm 0.5$  mm

Housing Material : Polycarbonate

Soldering : Lead-Free, Comply With RoHS

Label : Surface Print

## Wiring Diagram

