

Item	Value	Remark
Nominal voltage	100–242V	
Nominal frequency	47–63Hz	
AC voltage range	90–267V	
DC voltage range (start)	NA	
DC voltage range (operation)	NA	
Maximum voltage	NA	
Nominal current	620mA	Full load @100VAC
Total Harmonic Distortion (THD)	< 10%	Full load @100VAC
	< 15%	Full load @200VAC
Power factor	0.95	Full load @100VAC
Displacement factor	0.95	Full load @100VAC
Efficiency	86% (Typ.)	Full load @100VAC
No-load power	NA	
Stand-by power	< 0.3W	
Protection class	I	Suitable for class I luminaires
Inrush current	60A / 30uS	Full load @267VAC
Earth leakage current	<0.7mA	
Nominal voltage range		
600-1000mA	20-50Vdc	
1050mA	20-48Vdc	
1100mA	20-46Vdc	
1150mA	20-44Vdc	
1200mA	20-42Vdc	
Maximum voltage	63 Vdc	
Output channels	2	
Nominal current range	600-1200mA	Adjusted via NFC program Factory default 600mA
	Current accuracy	± 5% @25°C
Typical output LF current ripple	± 2.5%	Low Frequency< 120Hz Full load @200VAC
Nominal power range	12-50W	
Maximum power	50W	
Color tuning range	2000-10000K	Adjusted via NFC program Factory default 2000-10000K
Start up time	<1s	Full load @100VAC

	Item	Value	Remark	
Dimming	Dimming control	DALI	Touch-Dim	
	Dimming range	0.1-100%	5-100%	
	Lowest dimming current	0.05-0.15%	2-8%	
	Dimming technique	Hybrid Dimming	O/P current ≥ 50 mA operated @ Amplitude mode O/P current < 50 mA operated @ PWM mode	
	PWM frequency	500 Hz		
	Galvanic isolation	Basic insulated to PRI and double insulated to SEC		
	Item	Value	Remark	
Environment	Ambient temperature range t _a	-20°C - +50°C		
	Maximum case temperature t _c	80°C		
	Max. case temp. in fault condition	110°C	When operating under fault conditions, the temperature of the enclosure at any location should not exceed 110 °C	
	Storage temperature range	-40°C - +85°C		
	Relative humidity	10% - 95%		
	Surge transient protection	1kV , 2kV	L/N , L-PE/N-PE	
	Environmental rating	Indoor		
	IP rating	IP20		
	Mains switching cycles	>100,000		
	Expected lifetime	> 50,000 h,t _c 80°C @ ta 50 °C	0.2 % / 1,000 h failure rate	
	Dimension LxWxH	224.2x50.4x41mm / Ø max. 60mm		
Packing	Gross weight/box	kg		
	Net weight/box	kg		
	Pcs/box	20 PCS		
	Dimension/box	385(L)*310(W)*260(H)mm		
Protections				
Short-circuit Protection	Auto recovery			
Open-circuit Protection	Auto recovery			
Overload Protection	Auto recovery			
Conformity & Standards				
Safety standard:	EN 61347-1, EN 61347-2-13, EN 62493			
Performance:	EN 62384			
EMC standard:	EN 55015, EN 61000-3-2, EN 61000-3-3, EN 61547			
DALI protocol standard:	EN62386-101 , EN62386-102 , EN 62386-207(DT6),EN 62386-209 (DT8)/ DALI2			
Cable and Terminal information				
PRI Connection				
Terminal	L/N/GND - WAGO 294-113			
Cable cross-section	0.5-2.5□/AWG 18-12			
Stripping	9mm			
Sec Connection				
Color	LED1+	LED1-	LED2+	LED2-
Wire type	Red	Black	Brown	White
Wire diameter	1430	1430	1430	1430
Wire length	AWG22	AWG22	AWG22	AWG22
Terminal	175mm	175mm	175mm	175mm
	SMP-04V-BC+SHF-001T-0.8BS (JST)			

DALI/Touch Dim Connection	DA	DA
Color	Purple	Gray
Wire type	7022	7022
Wire diameter	AWG20	AWG20
Wire length	125mm	125mm
Terminal	WAGO 294-4032	
Cable cross-section	0.5-2.5□/AWG 18-12	
Stripping	9mm	

Subject to change without notice, HEP guarantees all products perform functionally well


Current adjustable

Output current/Color temperature can be adjusted by NFC reader and APP

NFC Reader (optional)

Feature:

Easily on-line read a output current from a driver or write a new current data to a driver throughout HEP NFC reader within few seconds.

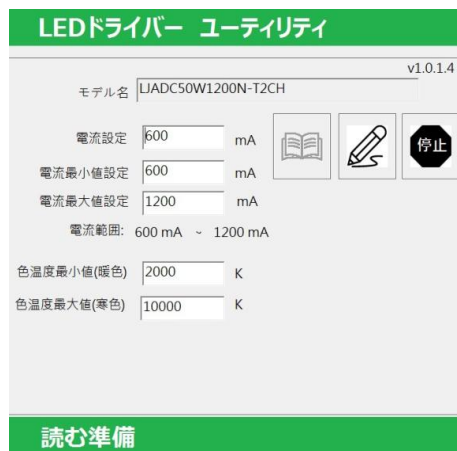

NFC APP

Feature:

Quickly check output current of a LED driver simply via Android smart phone, as well as, correct or setup a new current data immediately with no extra equipment at any job site.

ICON



Main



Keep NFC emission of smart phone closed to NFC antenna of LED driver

Touch instantly to tune output current and/or color temperature



QR Code

Google play



APK




Android 4.2 Up
Smart phone with a NFC function

Output Current (mA)	Output Voltage Range (V)	Output Power Range (W)
1200	20-42	24.0-50.0
1150	20-44	23.0-50.0
1100	20-46	22.0-50.0
1050	20-48	21.0-50.0
1000	20-50	20.0-50.0
950	20-50	19.0-47.5
900	20-50	18.0-45.0
850	20-50	17.0-42.5
800	20-50	16.0-40.0
750	20-50	15.0-37.5
700	20-50	14.0-35.0
650	20-50	13.0-32.5
600	20-50	12.0-30.0


* Upon client's special demand, customized current range in between 600 mA and 1200 mA could be specified as factory default from shipment. This default current range available revised again via NFC reader program at client's site, if necessary.

V/I Curve


Output Power Range

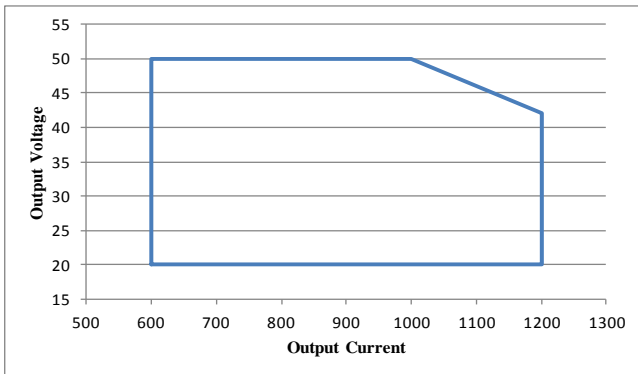

DALI Curve

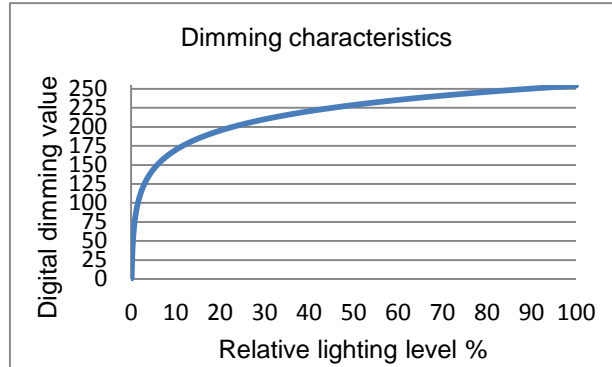

Dimming Curve

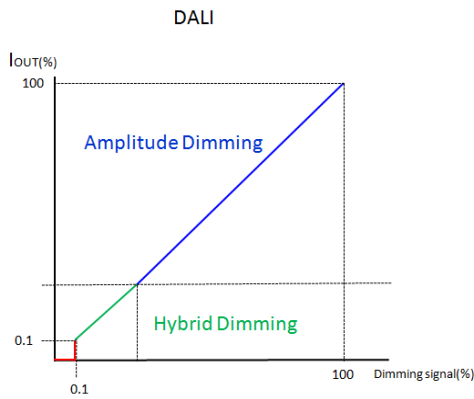

Electrical Values

