


**Electronic Ballast for 80W X 2**

**220-240V**



**Approval Marks**

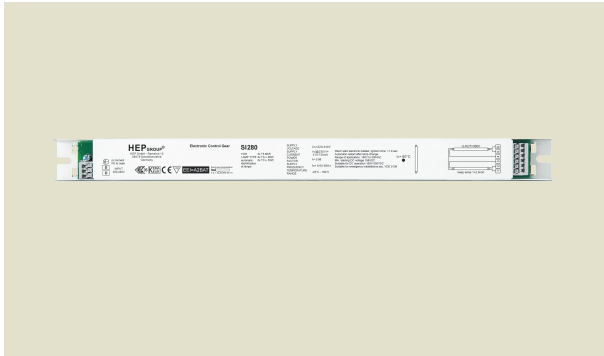

**Product Specification**


Parameter	Conditions	Min	Nom	Max	Unit
Number Of Lamps Driven		-	2	-	-
Lamp Power	25°C, Nominal Input	-	73 X 2	-	W
Input Power	EEL=A2 BAT Class(CELMA)	-	158	-	W
Rated Input Voltage	25°C	220	230	240	V
AC Input Voltage Range	25°C	198	-	264	V
DC Input Voltage Range	25°C	180	-	260	V
Input Frequency	25°C	0	50-60	-	Hz
Input Current	25°C, Nominal Input	-	720	-	mA
Power Factor	25°C, Nominal Input	0.93	0.98	-	-
Operating Frequency	25°C, Nominal Input	40	-	-	KHz
Lamp Current Crest Factor	25°C, Nominal Input	-	-	1.50	-
THD	25°C, Nominal Input	-	-	22%	-
Ballast Lumen Factor	25°C, Nominal Input	0.90	0.95	1.05	-
Starting Time	25°C, Nominal Input	-	-	1	S
Operating Ambient Temperature	Nominal Input	-25	-	+60	degC
Max Allowed Case Temperature	Minimum Input	-	-	+75	degC
Dimming Range	25°C, Nominal Input	-	-	-	-
Lamp Start At Dimming Position	25°C, Nominal Input	-	-	-	-
Average Service Life	at 60 degC ambient	60,000	-	-	hours
Failure Rate Per 1000h Operation	at 60 degC ambient	-	-	0.20%	-
End - Of - Life Protection			Yes		
Automatic Shutdown In Case Of Lamp Failure			Yes		
Automatic Restart After Lamp Replacement			Yes		

**Lamp Type** T5 80W HO x 2

**Application Space**

Indoor Use  
(Low Humidity, No Condensation)

**Physical Parameter**

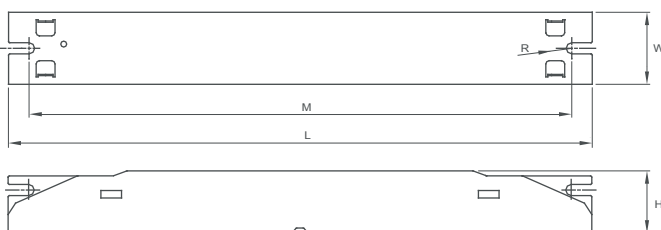

L : 360 mm    H : 26 mm  
M : 342.8 mm    K :  
N :                R : 1.3 mm  
W : 30 mm    Slot On One Side Allowing Alignment : M+/-3 mm  
Tolerance : ≥0 ~ 100 ≥+/-0.5 mm  
              100 ~ ≥ +/-1 mm

Terminal Block : Push - Button, Angled Entry  
Housing Material : Metal, No Sharp Edges  
Soldering : Lead - Free, Comply With RoHS  
Label : Surface Print

**Wiring Diagram**

